


WR28 Waveguide Coupler

Features

- 26.5 GHz to 40 GHz Frequency Range
- Three Port Crossguide Waveguide Coupler
- Integrated 2.92mm Female Connector for the coupled port
- 40 dB Typical Coupling Level
- 200W (CW) Max Input Power
- WR28 Waveguide
- Temperature: $-55\div100^{\circ}C$

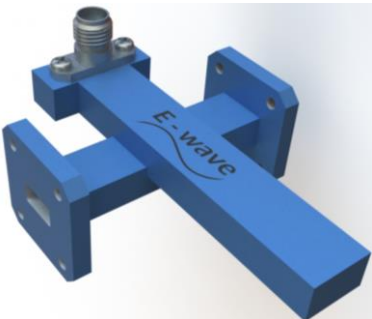

Electrical specifications

Description	Minimum	Typical	Maximum	Unit
Frequency range	26.5		40	GHz
VSWR			1.5	
Coupling Level		40		dB
Insertion Loss		0.2		dB

Mechanical drawing

